

**FEATURING
PLANETARY GEAR
DESIGN**


T71FC AND T72FC ROTARY STEERING SYSTEMS

A COMPLETE STEERING SYSTEM CONSISTS OF:

- Steering helm:
 - T71FC - 38867 H - single cable steering helm
 - T72FC - 38868 K - dual cable steering helm
- Black mounting bezel:
 - X34 - 36654 B - 90° mounting
 - X35 - 36655 C - 20° mounting
- Steering cable: **M66** (Note: two M66 are needed with the T72FC system)
- Optional steering wheel (see index)
- Engine connection kits (see index)

FEATURES AND TECHNICAL SPECIFICATIONS

- Fast connect, simple installation
 - All stainless steel cable output ends
 - Corrosion resistant materials
 - Particulary suitable where clearance is limited
 - Optional 90° or 20° installation
 - Standard 3/4" tapered shaft
 - Lock-to-lock steering wheel turns: approx. 3,8
 - Stroke: 9" (228 mm)
 - Maximum allowable steering wheel diameter: 16" (406 mm)
 - Minimum steering cable bend radius: 7.9" (200 mm)
 - Minimal feedback
 - Compact for mounting
 - T71FC and T72FC steering systems are not to be used on boats equipped with engines that exceed the maximum horsepower rating of the boat
 - For boats faster than 50 mph the twin cable steering system T72FC is recommended
 - T71FC and T72FC steering systems are also available in package with ROTECH (see page 8)
-
- Exceeds EN 28848 safety standards
 - Exceeds ABYC P17 safety standards

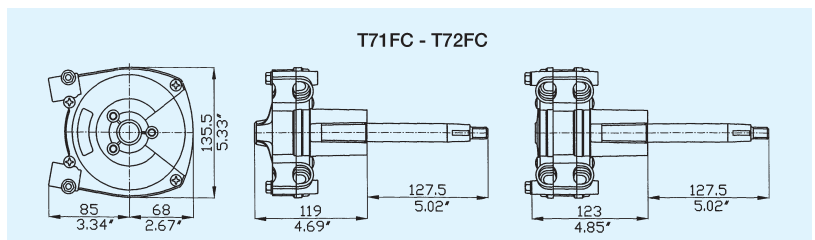

9